



Applicable Requirements :  
ANSI/UL 1017  
CSA C22.2 No.243

## Characteristics



HEPA -  
Included



High Filtration  
Efficiency Unit



Wet and Dry  
Recovery



- HEPA filter with an efficiency of 99.995% at 0.3 micron. Tested IEST-RP-CC001. H14 by MPPS method as per EN 1822 and OSHA compliant. All of our HEPA vacuum systems are aerosol leak tested before leaving our facility - included
- For general housekeeping
- Heavy duty 2-stage by-pass motor
- For wet & dry recovery
- Polyethylene recovery tank
- Silent operation
- Mounted on a Tilting Cart (TC) for easy disposal of recovered materials

## Specifications


2D-15 (TC) RE HEPA	110566A
<b>Model Name</b>	2D-15 (A) (TC) RE HEPA
<b>Type (Powerhead)</b>	Electric
<b>Voltage</b>	120 V
<b>Hertz</b>	60 Hz
<b>Phase</b>	Single
<b>Wattage</b>	1207 W
<b>Power</b>	1.6 HP
<b>Amperage</b>	10.5 A
<b>Air Flow</b>	110 CFM
<b>Vacuum Pressure</b>	107 " H <sub>2</sub> O
<b>Sound Level</b>	69 dB(A)
<b>Plug Type</b>	120V
<b>Suction Inlet</b>	1.5 "
<b>Cart Type</b>	Tilt Cart (TC)
<b>Filter Cleaning</b>	None
<b>Dry Recovery - Tank</b>	12.5 Gal
<b>Dry Recovery - Disposable Filter Bag</b>	5 gal.
<b>Liquid Recovery Capacity</b>	12.5 gal.
<b>Length</b>	30 "
<b>Width</b>	28 "
<b>Height</b>	38 "
<b>Weight (Vacuum Only)</b>	77 lb.
<b>Cord Length</b>	35 ft.

Please note that specifications are subject to change without notice

## Use only recommended tools & accessories



HEPA Filter - Included

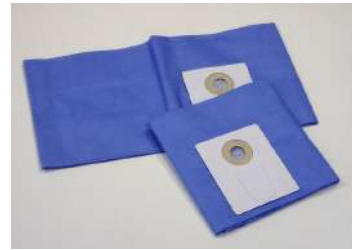

Disposable Filter Bag - Included



Clear Polyliner Recovery Bags - Included



PVC Crushproof Suction Hose Assembly - Included



Tools and Accessories (Toolkit 4B) - Optional