


Characteristics

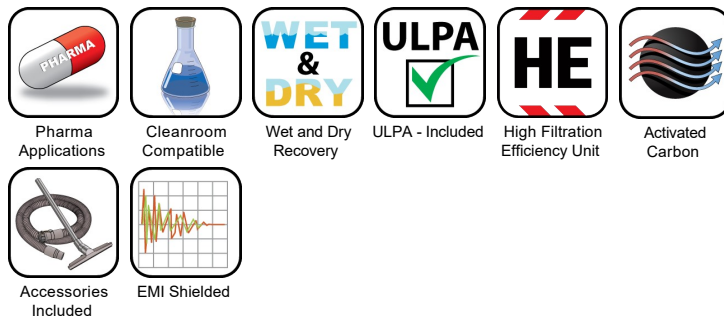

- ULPA filter with an efficiency of 99.999% at 0.12 micron. Filtration efficiency of 99.9995% at 0.18 micron. Tested IEST-RP-CC001. U15 by MPPS method as per EN 1822. All of our ULPA vacuum systems are aerosol leak tested before leaving our facility - included
- Cleanroom compatible with ISO Class 4 (former Class 10). Can be used in the Pharmaceutical industry
- EMI/RFI Shielded
- 5-stage filtration system, includes dual ULPA filters (U15) (one for the working air and one for the cooling air), double cloth filter, and disposable filter bags
- Available with a Middle Ring with Activated Carbon (MRAC) for the adsorption of toxic/noxious fumes and vapors
- Designed for use in contamination controlled environments
- Heavy duty 2-stage by-pass motor
- For wet & dry recovery
- Polyethylene recovery tank with polished metal powerhead
- Mounted on a 4-wheel dolly for easy maneuverability
- Includes a complete tool kit.

Specifications

CWR POLY SERIES	110498B	110498C	110498D	110498E	110499B	110499C
Model Name	CWR-15 (4W) POLY	CWR-15 (4W) POLY	CWR-15 (4W) POLY	CWR-15 (4W) POLY	CWR-8 POLY	CWR-8 POLY
Type (Powerhead)	Electric	Electric	Electric	Electric	Electric	Electric
Tension	240 V	240 V	240 V	240 V	240 V	240 V
Frequency	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz
Phase	Single	Single	Single	Single	Single	Single
Wattage	1050 W	1050 W	1050 W	1050 W	1050 W	1050 W
Power	1 kW	1 kW	1 kW	1 kW	1 kW	1 kW
Amperage	5 A	5 A	5 A	5 A	5 A	5 A
Air Flow	189 m ³ /h	189 m ³ /h	189 m ³ /h	189 m ³ /h	189 m ³ /h	189 m ³ /h
Vacuum Pressure	2180 mm H ₂ O	2180 mm H ₂ O	2180 mm H ₂ O	2180 mm H ₂ O	2180 mm H ₂ O	2180 mm H ₂ O
Sound Level	75 dB(A)	75 dB(A)	75 dB(A)	75 dB(A)	75 dB(A)	75 dB(A)
Type of Power Outlet	European	UK	Swiss	Chinese	European	UK
Suction Inlet	38 mm	38 mm	38 mm	38 mm	38 mm	38 mm
Cart Type	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)
Filter Cleaning	None	None	None	None	None	None
Dust Recovery Tank	47.3 L	47.3 L	47.3 L	47.3 L	24.6 L	24.6 L
Dry Recovery - Disposable Filter Bag	19 L	19 L	19 L	19 L	9.5 L	9.5 L
Liquid Recovery Capacity	47.3 L	47.3 L	47.3 L	47.3 L	24.6 L	24.6 L
Length	cm	cm	cm	cm	58 cm	58 cm
Width	cm	cm	cm	cm	48 cm	48 cm
Height	cm	cm	cm	cm	76 cm	76 cm
Weight (Vacuum Only)	kg.	kg.	kg.	kg.	18.1 kg.	18.1 kg.
Cord Length	10.6 m	10.6 m	10.6 m	10.6 m	10.6 m	10.6 m
CWR POLY SERIES	110499D	110499E				
Model Name	CWR-8 POLY	CWR-8 POLY				
Type (Powerhead)	Electric	Electric				
Tension	240 V	240 V				
Frequency	50 Hz	50 Hz				
Phase	Single	Single				
Wattage	1050 W	1050 W				
Power	1 kW	1 kW				
Amperage	5 A	5 A				
Air Flow	189 m ³ /h	189 m ³ /h				

Vacuum Pressure	2180 mm H ₂ O	2180 mm H ₂ O
Sound Level	75 dB(A)	75 dB(A)
Type of Power Outlet	Swiss	Chinese
Suction Inlet	38 mm	38 mm
Cart Type	4 Wheel Dolly (4W)	4 Wheel Dolly (4W)
Filter Cleaning	None	None
Dust Recovery Tank	24.6 L	24.6 L
Dry Recovery - Disposable Filter Bag	9.5 L	9.5 L
Liquid Recovery Capacity	24.6 L	24.6 L
Length	58 cm	58 cm
Width	48 cm	48 cm
Height	76 cm	76 cm
Weight (Vacuum Only)	18.1 kg.	18.1 kg.
Cord Length	10.6 m	10.6 m

Please note that specifications are subject to change without notice

Use only recommended tools & accessories



CWR-8 Poly Tank



ULPA Filter - Included



CWR Tools and Accessories - Included



CWR Tools and Accessories - Optional



Needle Trap - Optional